


Port of Los Angeles

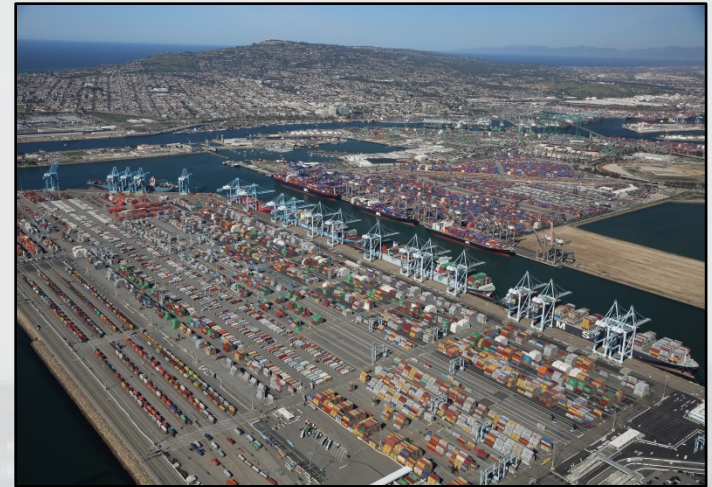

CMANC
January 22, 2016

Port of Los Angeles at a Glance

- Founded in 1907
- Non-taxpayer supported
- Landlord business model
- 4,300 acres land (1,740 ha)
- 3,200 acres water (1,295 ha)
- 270 berths and 27 cargo terminals
- 8 container terminals
- 86 cranes



Harbor Department
Administration Bldg.



Downtown Los Angeles
City Hall

Global & US Port Rankings

Top Container Ports


(in millions of TEUs)

Global (2013)

1.	Shanghai, China	33.6
2.	Singapore	32.2
3.	Shenzhen, China	23.3
4.	Hong Kong	22.3
5.	Busan, South Korea	17.6
6.	Ningbo, China	17.3
7.	Qingdao	15.5
8.	Guangzhou, China	15.3
9.	Los Angeles/LB	15.1
10.	Dubai, Arab Emirate	13.6

North America (2014)

1.	Los Angeles	8.3 (+6%)
2.	Long Beach	6.8
3.	NY/NJ	5.7
4.	Tacoma/Seattle	3.4
5.	Savannah	3.3
6.	Vancouver	2.9
7.	Oakland	2.4
8.	Norfolk	2.4
9.	Manzanillo	2.4
10.	Houston	1.9

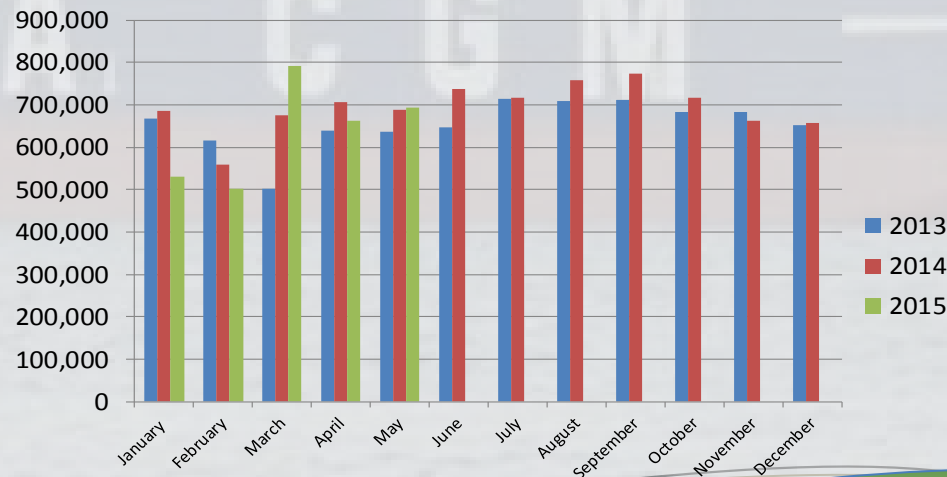

Port of Los Angeles

Main Channel Deepening Project

**Construction Contract:
\$315,000,000**


Completed in 2013

Depth -53'

-15 Million Cubic Yards dredged

-New Landfills

-Habitat Expansion

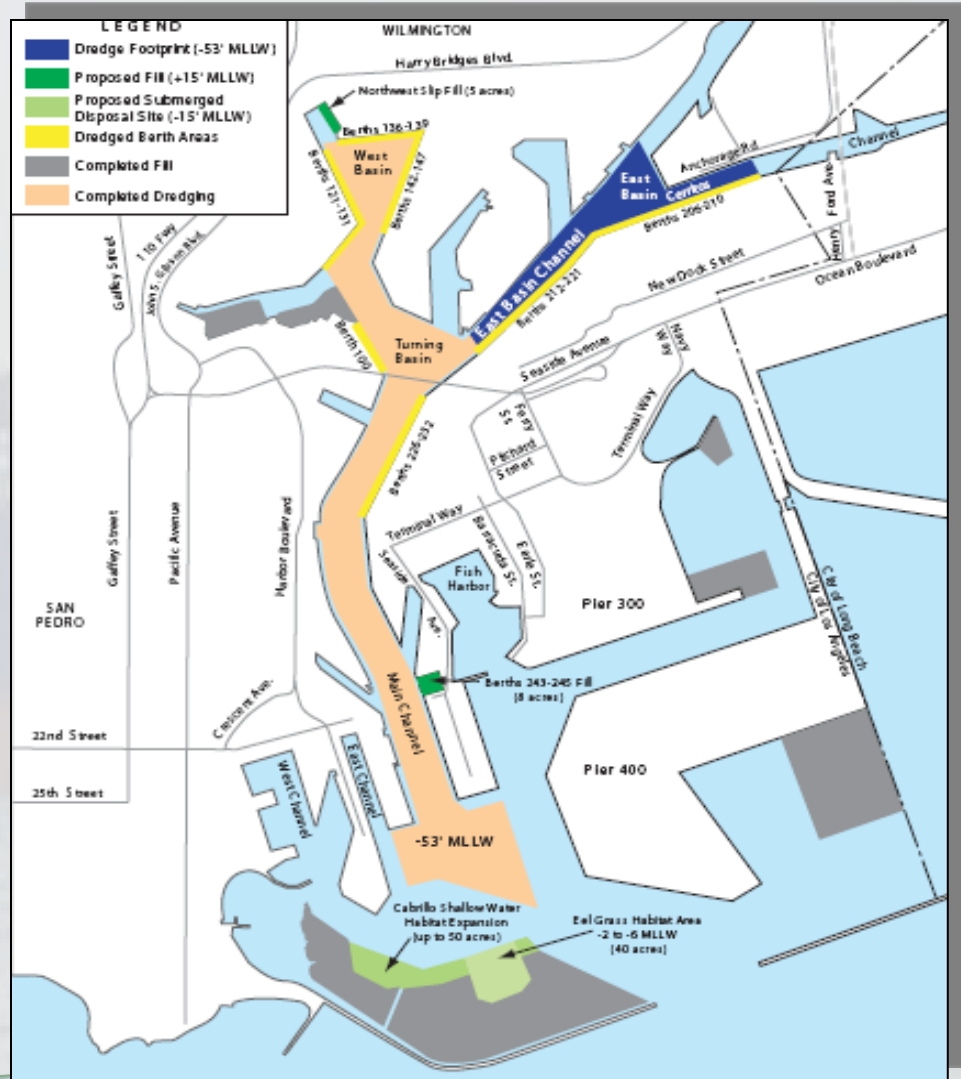

Big Ship Ready



TraPac Terminal


Berth 136-147



Status: In Construction

Project Elements

- 240 Acre Automated Terminal
- On-dock rail
- 2 Deep Water Berths (-53')
- Buildings, Gates, Backland areas
- Start/Finish: 2008/2017

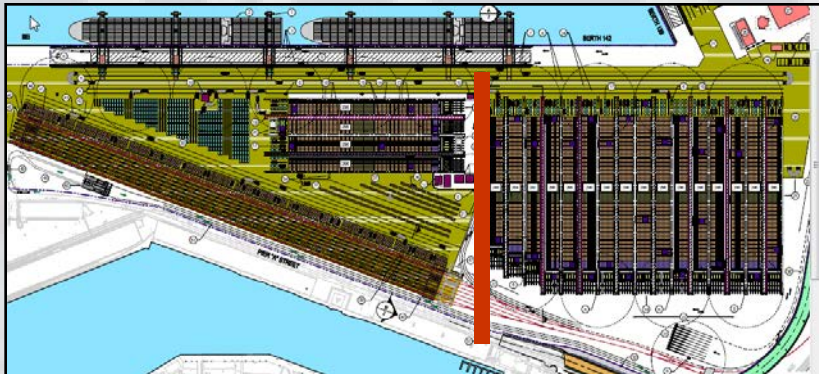



Projects in Construction

- Backland
- ICTF
- Buildings and Main Gate
- Crane Maintenance Building

- Project Total - \$510.3M
- FY 14/15 - \$100.4M

Yusen Terminals

Berths 212-224

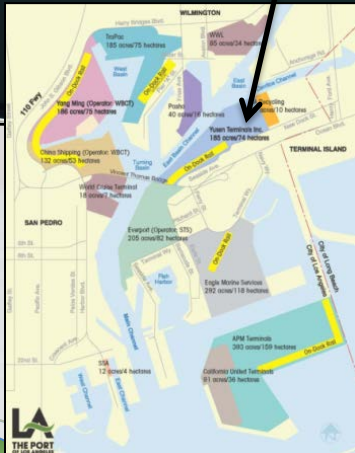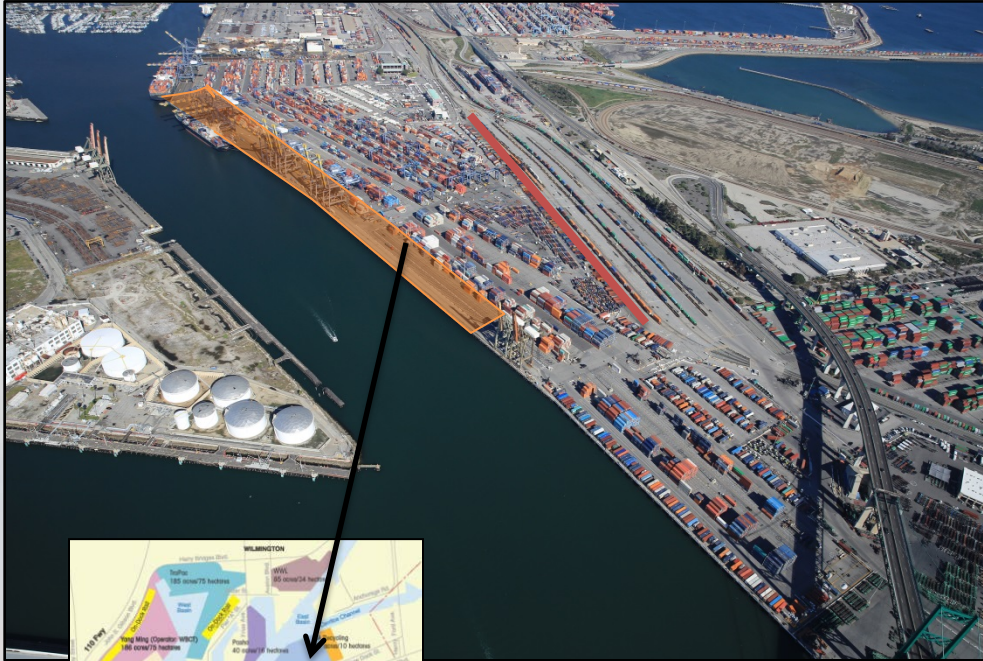

Status: In Construction

Project Elements

- 2600 LF wharf upgrade
- -53' draft
- Additional loading track

Schedule

- EIR certification: 10/16/14
- Start Construction: June 2015
- Complete Construction: May 2017
- Project Total - \$58 M




- 2,800 LF wharf upgrade -53' (16.1 M) and -47' (14.3 M)
- 1.5 acre backland

- EIR NOP/NOI: 10/24/14
- Certification: April 2016
- Construction Start: Fall 2016

[illegible]

Yang Ming Terminal

Berths 121-131

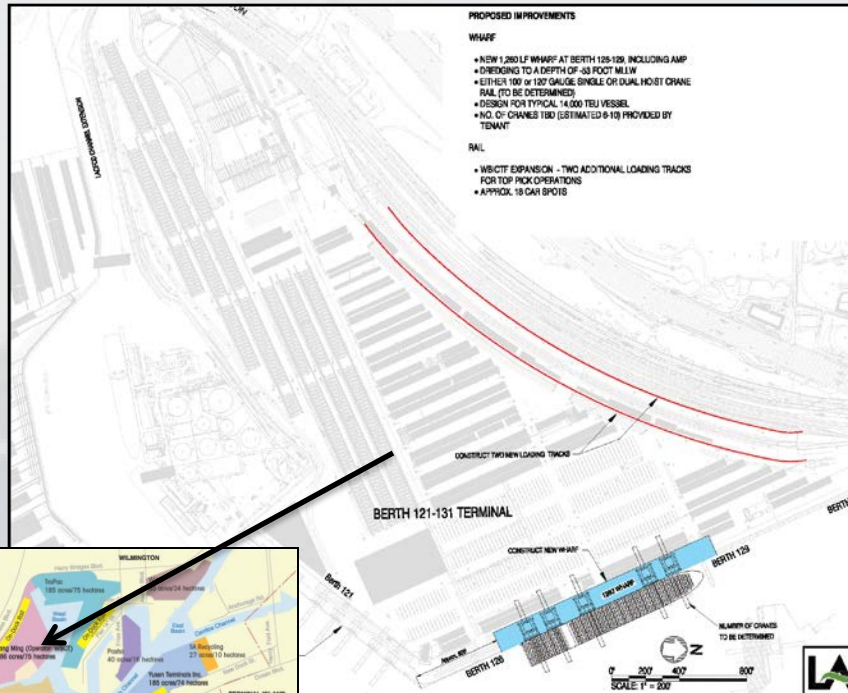

Project Total: \$120 M

Status: EIR/EIS

Project Elements

- 1,260 L.F. Wharf (384 M)
- New wharf with 53' (16.1 M)
- Rail (2 new loading Tracks)
- New 100' gauge cranes

Schedule:

- NOP/NOI on April 11, 2014
- EIR/EIS Certified 2nd Qtr 2016


Eagle Marine Services- Pier 300

Project Elements

- 1250 ft of new Wharf
- 41.2 acres of backland
- 11 acres redeveloped
- Total acreage: 315

Schedule

- EIR/EIS Completed in 2012
- Pending Lease Negotiations

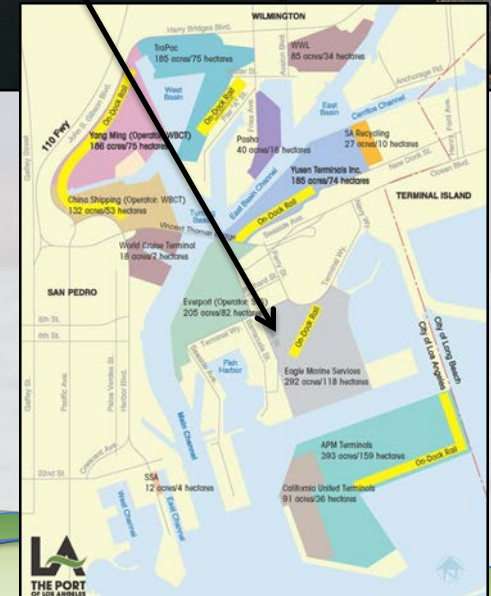

MOTEMS

- Projects \$178M
 - B 238 ExxonMobil
 - B 167-169 Shell
 - B 163 Nustar
 - B 148-151 Phillips 66
 - B 164 – Valero
 - B187-191 Vopak
-
- Schedule FY16/17 – FY 19/20



Maintenance Dredging

- Berths 195-200 \$ 930,000
- Berths 210-211 \$ 250,000
- Berths 401-406 \$2,200,200
- Berths 226-236 ?
- Berths 136-147 ?

San Pedro Waterfront



Downtown Harbor





AltaSea. Redevelopment of City Dock No.

1 into an Urban Marine Research Center



Thank You!



Port of Los Angeles
425 South Palos Verdes Street, CA 90731
Phone: (310) 732-3840
www.portoflosangeles.org